PRODUCT SPECIFICATIONS DSR42 Designer See-Through Radiant Wood Burning Fireplace





DIMENSIONS


Actual size: 47" W x 58% H x 28" D (1016 mm x 1022 mm x 610 mm) Viewing area: 42" W x 23" H (966 sq. in.) (1067 mm X 584 mm, 6233 cm²) Framing Dimensions: 48" W x 39% H x 27" D (1219 mm x 994 mm x 686 mm)


STANDARD FEATURES


- Clean face design and fully insulated see through fireplace
- Full refractory lining
- Authentic masonry appearance
- Powder coated finish
- Safety firescreen
- Dual gas knockouts
- Steel grate
- Outside air kit standard
- Attic insulation shield standard
- UL/ULC Listed

OPTIONAL FIELD INSTALLED ACCESSORIES

- Bi-fold glass doors with Black trim (DM1242)
- SL1100 series termination caps
- 4" insulated flex duct for outside air (ID4)
- 4" uninsulated flex duct for outside air (UD4)
- Chimney air kit (CAK4A)
- Gas logs available

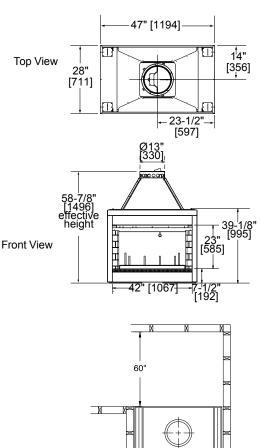





Framing dimensions in illustrations accommodate 1/2" finishing material.


Note: DSR42 is not approved for sale or use in Canada.

Right Side View


PRODUCT SPECIFICATIONS DSR42 Designer See-Through Radiant Wood Burning Fireplace



MANTEL CLEARANCES

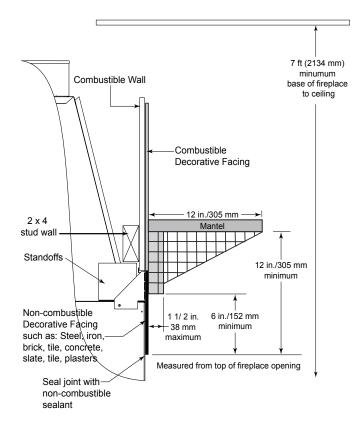

SURROUND, STUB WALL, MANTEL LEG CLEARANCES



Gridlines at 1 in. scale



A Brand of Vermont Castings Group 149 Cleveland Drive, Paris, Kentucky 40361 www.majesticproducts.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2015 Vermont Castings Group 0415v1

Firestop framing: 17" x 17" (432 mm x 432 mm) Minimum flue height: 14' (4.3 m)

• Clearance to flue: 2" (51 mm)

Flue series: SL1100 series pipe

- Maximum flue height: 90' (27.4 m)
- Minimum height with single offset/return: 16.5' (5 m)

• Flue size: 11" (279 mm) inner; 13" (330 mm) outer

- Minimum height with double offset/return: 22' (6.7 m)
- Minimum hearth size: 20" D x 66" L (508 mm x 1676 mm)
- UL/ULC design certified

CLEARANCES

- Clearance to fireplace: 1/2" (13 mm)
- Maximum mantel depth: 12" (305 mm) from top of fireplace opening
- Minimum mantel height: 6" (152 mm) from top of fireplace opening
- Adjacent combustible sidewalls: minimum 12" (305 mm) from fireplace opening
- Mantel leg, surround, stub wall, whether combustible or non-combustible may be constructed as shown in the second drawing.