DRT2000 SERIES

DIRECT VENT GAS FIREPLACES






STANDARD FEATURES

- Available in 35", 40" and 45" models
- Mid-size 17" depth saves installed floor space
- Dedicated top or rear flue configuration (45" model is a combo top/rear)
- Millivolt or Electronic ignition models available
- Electronic ignition models include seamless battery backup and provides continued operation in the event of a power outage (IPI/CPI switch standard)
- Outstanding heating efficiency for increased comfort and lower operating costs
- Standard tempered glass and a protective screen*
- Detailed ceramic fiber log set
- Black painted interior (optional liners available)
- Optional blower and touch remote or hand-held remote control available for all models
- Durable textured powder coat finish
- 20 year limited warranty

INTERIOR -

Optional liners (Black Painted Interior is standard).



Porcelain Liner Kit (Black)



Greystone



Blackstone



Blended Brown

STAINLESS SURROUNDS (OPTIONAL)



Four-Sided



Three-Sided


REMOTE



Thermostatic Remote (Optional)




^{*}All applicable models comply with ANSI Z21.50/88 barrier requirements.

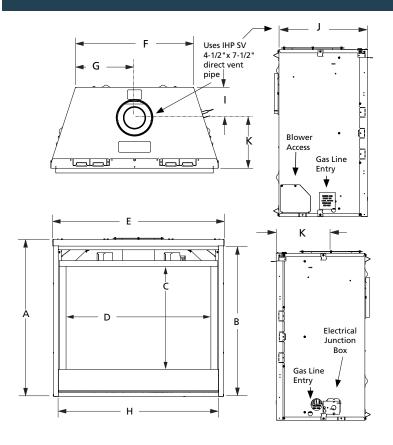

	DRT2035	DRT2040	DRT2045
Α	32-1/8"	37-1/8"	37-1/8"
В	26-5/8"	34-5/8"	34-58"
С	19-1/2"	24-1/2"	24-1/2"
D	29-1/4"	34-1/4"	39-1/4"
Е	35-1/4"	40-1/4"	45-1/4"
F	25"	30"	35"
G	12-1/2"	15"	17-1/2"
Н	32-7/8"	37-7/8"	42-7/8"
- 1	6-7/8"	6-7/8"	6-7/8"
J	17"	17"	17"
K	10-1/8"	10-1/8"	10-1/8"

On the cover: DRT2035 shown with Greystone Liner



	DRT2035	DRT2040	DRT2045
L	35-7/8"	40-7/8"	45-7/8"
М	36-1/4"	41-1/4"	41-1/4"
N	38-3/4"	43-3/4"	43-3/4"
0	18-1/2"	18-1/2"	18-1/2"
Р	23-3/8"	28-1/4"	28-1/4"

FIREPLACE EFFICIENCIES — Listed to ANSI Z21.88 as a gas fireplace heater.	Listed to ANSI Z21.88 as a gas fireplace heat	FIREPLACE EFFICIENCIES - Listed
---	---	---------------------------------

MODEL	FUEL	BTU/HR	AFUE**	P4/ENERGUIDE*	
DRT2035	NG	17,000	68.2%	64.6%	
DRT2035	LP	17,000	67.9%	67.8%	
DRT2040	NG	20,000	70.3%	62.4%	
DRT2040	LP	18,500	71.5%	62.4%	
DRT2045	NG	22,000	71.9%	62.7%	
DRT2045	LP	21,000	71.8%	63.6%	

- $\hbox{*Intermittent ignition systems. Millivolt/Electronic.}\\$
- **Annual Fuel Utilization Efficiency (AFUE) is the recognized U.S. rating system for the total efficiency of heating products.

As with any fireplace, this appliance is extremely hot during operation. Read and understand all $operating\ instructions\ before\ using\ this\ appliance.\ For\ further\ information,\ consult\ your\ dealer.$

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

 $Diagrams, illustrations \ and \ photographs \ are \ not \ to \ scale-consult \ installation \ instructions. \ Product$ designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance







